

150 & 550 Series Approach Suit

RADIANT HEAT PROTECTION




Newtex's 150 / 550 Series Approach Suits are lightweight, radiant-heat resistant suits designed for use in foundries, steel mills, chemical plants, and other industries and applications where ambient temperatures can reach 200°F (93°C). The suits have an aluminized Zetex® outer shell that reflects 90% of radiant heat to support radiant temperatures to 2000°F (1093°C), and are fabricated without bulk insulation layers to allow for flexibility and freedom of movement. The 150 Series has a flame-resistant cotton lining for comfort, while the 550 Series has a flame-resistant vapor barrier lining for added protection from steam, vapor and liquids.

Industries: Foundries and Casting Operations, Welding and Hot Works Operations, Glass and Ceramic Plants Production, Power Generation, Petrochemical and Refining, Laboratory and Testing Facilities

Temperature Rating

- Short duration ambient heat of 200°F (93°C)
- Radiant heat to 2000°F (1093°C)

Ambient heat is the equilibrium temperature in an area. Radiant heat is given off by a heat source in proximity. Duration varies depending on the amount of conductive heat transferred during the operation. **The 150 and 550 Series Approach Suits do not have bulk insulation layers and should not be used for fire entry.**

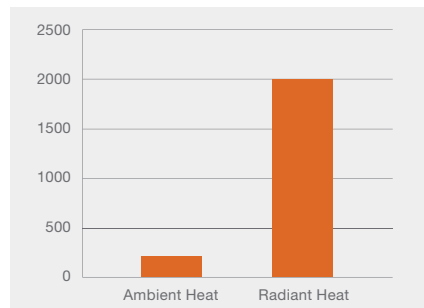

Features

- Aluminized Zetex® outer shell reflects 90% of radiant heat
- Fire-resistant vapor barrier lining (550 Series) or fire-resistant cotton inner lining (150 Series) for comfort
- Fabricated without bulk insulation layers to allow for flexibility and freedom of movement
- Complete set with Hood, Coat, Pants, Boots, Gloves, and Duffle Bag for storage. Also available in one piece coverall style
- Optional accommodation for Breathing Apparatus set (550 Series)
- Made from inorganic Zetex® materials, which meet UL 214/NFPA 701, MIL-C-20079, MIL-I-24244, NRC 1.36, and European BS EN407
- CE certified to EN 531:1995 Protective Clothing for Industrial Workers Exposed to Heat

Protective Suits Selection Guide

The 150 and 550 Series are part of Newtex's Extreme Protective Line, which includes Fire Entry, Proximity, and Approach Suits.

Style	Description	Ambient Heat	Total Flame*	Radiant Heat	Insulation Layers	Outer Layer	Breathing Apparatus
3000 Series	Fire Entry	1500°F (815°C)	2000°F (1093°C)	3000°F (1650°C)	8	Aluminized	Required
2000 Series	Fire Entry	1500°F (815°C)	2000°F (1093°C)	N/A	8	ZetexPlus®	Required
850 Series	Kiln	800°F (427°C)	N/A	2000°F (1093°C)	6	Aluminized	Required
750 Series	Proximity	550°F (288°C)	N/A	2000°F (1093°C)	5	Aluminized	Recommended
➤ 550 Series	Approach	200°F (93°C)	N/A	2000°F (1093°C)	2	Aluminized	Optional
➤ 150 Series	Approach	200°F (93°C)	N/A	2000°F (1093°C)	2	Aluminized	Not required

*N/A indicates suit is not designed for the specified use. For example, the 150 Series is not designed for Total Flame/Fire Entry.

Specifications

1. Type of Suit

Radiant Heat Protective Approach Suit

2. General Description

Lightweight, radiant-heat protective suits used in industrial and factory applications. Designed to allow for flexibility and freedom of movement.

3. Material

A. 150 Series: 2 layer construction includes: Aluminized Zetex® outer shell, flame-resistant cotton lining.

B. 550 Series: 2 layer construction includes: Aluminized Zetex® outer shell, neoprene-coated flame-resistant cotton lining.

4. Temperature Rating

Short duration ambient heat of 200°F (93°C), radiant heat to 2000°F (1093°C).

5. Construction

A. Hood: Built-in shell provides structural support. Inner hard cap is ratchet adjustable and includes speedy clip for support.

B. Coat: Tailored sleeves with snap adjustment. Covered front snaps. Optional Breathing Apparatus accommodation (550 Series only).

C. Pants: High waist with 8 point adjustable elastic suspenders. Snapped triangular storm fly front. Snap adjustment on leg bottoms.

D. Boots: Leather sole and heels. Designed to fit over work shoes with adjustment-tightening straps.

E. Gloves: 14" length gauntlet style with leather palms.

One piece coverall styles (160 and 560 Series) also available.

6. Size and Weight

A. Weight: 150 Series Suit: 16 lbs (7.7 kg)

550 Series Suit: 20 lbs (9.1 kg) or 22 lbs (10.0 kg) with Breathing Apparatus

B. Size: Available in the following sizes:

Medium (42" - 44" chest, 42" waist)

Large (46" - 48" chest, 46" waist)

X Large (50" - 52" chest, 50" waist)

Custom sizes available for additional charge.

7. Certifications

Made from Zetex® fabrics, which meet UL 214/NFPA 701, MIL-C-20079, MIL-I-24244, NRC 1.36, and European BS EN407. CE certified to EN 531:1995 Protective Clothing for Industrial Workers Exposed to Heat.



150 Series

WARNING:

This product should only be used by qualified personnel. Product information provided herein is based on tests performed in specific conditions which may differ from the user's operating environment. It is the user's sole responsibility to determine whether this product is appropriate for the intended use. Newtex is not liable for any damage, loss, injury or death resulting from the use of this product, and makes no guarantees or representations with respect to these products and/or their fitness for any purpose.

NEWTEX
EXTREME PROTECTIVE

Headquarters

8050 Victor-Mendon Road
Victor, NY 14564
USA

Tel 800-836-1001

Fax 585-924-4645

E-mail sales@newtex.com

Web www.newtex.com

Asia/Pacific Office

48 Toh Guan Road East
#05-99 Enterprise Hub
Singapore 608586

Tel 65 6748 1138

Fax 65 6748 0848

E-mail sales@newtex.com.sg

Web www.newtex.com.sg

For over 25 years, Newtex Industries has been a trusted leader in high temperature protective clothing and equipment. Our protective apparel, gloves, mitts, and fire curtains are made from performance Zetex®, ZetexPlus®, KEVLAR®, and aluminized fabrics to resist temperatures up to 2000°F while providing outstanding protection from heat, fire, sparks, and molten splash.



Newtex 2000 Series
Fire Entry Suit